


	Performance and technical characteristics																																																		
		<table border="0"> <tr> <td>Mains supply</td> <td>230V~ 50/60Hz 10 W</td> </tr> <tr> <td>Max flow rate</td> <td>8 l/h (2.1 gph)</td> </tr> <tr> <td>Max discharge head</td> <td>6 m (20 ft)</td> </tr> <tr> <td colspan="2">Noise level in accordance with EN ISO 3744 (Measured at LNE lab, pump operating with water, out of application)</td> </tr> <tr> <td></td> <td>21.5 dBA at 1 m</td> </tr> <tr> <td colspan="2">Noise level in application (Measured in Sauermann acoustic lab, pump operating with water)</td> </tr> <tr> <td></td> <td>≤ 28 dBA at 1 m</td> </tr> <tr> <td colspan="2">Detection unit</td> </tr> <tr> <td>Detection Levels</td> <td>Integrated On:18mm Off :12mm AI :21mm</td> </tr> <tr> <td colspan="2">Alarm contact</td> </tr> <tr> <td></td> <td>NC 8 A resistive</td> </tr> <tr> <td colspan="2">Thermal protection (overheat)</td> </tr> <tr> <td>Protection</td> <td>90°C IP 54</td> </tr> <tr> <td colspan="2">Safety Standards</td> </tr> <tr> <td></td> <td>CE</td> </tr> <tr> <td colspan="2">RoHS directive</td> </tr> <tr> <td>WEEE directive</td> <td>Conform</td> </tr> <tr> <td colspan="2">Pump dimensions</td> </tr> <tr> <td>Cover dimensions</td> <td>L 66 x W 44 x H 77 mm</td> </tr> <tr> <td>Duct Dimensions</td> <td>L 165 x W 165 x H 60 mm</td> </tr> <tr> <td>Delta Pack box dimensions</td> <td>L 750 x W 80 x H 60 mm L 770 x W 185 x H 70 mm</td> </tr> <tr> <td colspan="2">Delta Pack Weight</td> </tr> <tr> <td>Master Pack quantity</td> <td>1.5 kg boxes of 10pcs (9 boxes per pallet)</td> </tr> <tr> <td colspan="2">Master pack dimensions</td> </tr> <tr> <td></td> <td>L 800 x W 380 x H 360 mm</td> </tr> </table>	Mains supply	230V~ 50/60Hz 10 W	Max flow rate	8 l/h (2.1 gph)	Max discharge head	6 m (20 ft)	Noise level in accordance with EN ISO 3744 (Measured at LNE lab, pump operating with water, out of application)			21.5 dBA at 1 m	Noise level in application (Measured in Sauermann acoustic lab, pump operating with water)			≤ 28 dBA at 1 m	Detection unit		Detection Levels	Integrated On:18mm Off :12mm AI :21mm	Alarm contact			NC 8 A resistive	Thermal protection (overheat)		Protection	90°C IP 54	Safety Standards			CE	RoHS directive		WEEE directive	Conform	Pump dimensions		Cover dimensions	L 66 x W 44 x H 77 mm	Duct Dimensions	L 165 x W 165 x H 60 mm	Delta Pack box dimensions	L 750 x W 80 x H 60 mm L 770 x W 185 x H 70 mm	Delta Pack Weight		Master Pack quantity	1.5 kg boxes of 10pcs (9 boxes per pallet)	Master pack dimensions		
Mains supply	230V~ 50/60Hz 10 W																																																		
Max flow rate	8 l/h (2.1 gph)																																																		
Max discharge head	6 m (20 ft)																																																		
Noise level in accordance with EN ISO 3744 (Measured at LNE lab, pump operating with water, out of application)																																																			
	21.5 dBA at 1 m																																																		
Noise level in application (Measured in Sauermann acoustic lab, pump operating with water)																																																			
	≤ 28 dBA at 1 m																																																		
Detection unit																																																			
Detection Levels	Integrated On:18mm Off :12mm AI :21mm																																																		
Alarm contact																																																			
	NC 8 A resistive																																																		
Thermal protection (overheat)																																																			
Protection	90°C IP 54																																																		
Safety Standards																																																			
	CE																																																		
RoHS directive																																																			
WEEE directive	Conform																																																		
Pump dimensions																																																			
Cover dimensions	L 66 x W 44 x H 77 mm																																																		
Duct Dimensions	L 165 x W 165 x H 60 mm																																																		
Delta Pack box dimensions	L 750 x W 80 x H 60 mm L 770 x W 185 x H 70 mm																																																		
Delta Pack Weight																																																			
Master Pack quantity	1.5 kg boxes of 10pcs (9 boxes per pallet)																																																		
Master pack dimensions																																																			
	L 800 x W 380 x H 360 mm																																																		

Features & benefits

Easy to install:

- **New bracket:** mounted directly on the wall with no need for a template, by means of only 2 screws.
- Easy Installation of the pump: horizontal Insertion by the front.
- 1 monobloc elbow.
- Clip-on system: duct can be cut without trimming edges;
- Large room for routing insulated copper tubing (max recommended pipe size: 5/8" - 3/8" insulated);
- Reversible mounting (right & left of the AC unit);

Low noise:


- **Low noise installation:** The new metal bracket supporting the pump is mounted directly on the wall, with flexible, vibration dampening rubber pads;
- Low noise pump: S11082 pump is ≤ 21.5 dBA.

Low maintenance:

- **Limited fouling:** A comb retains long particles at the condensate inlet.
- Pump with 2.5 mm ID section and equipped with a duckbill valve to allow small particles to pass through (<2mm).

Short time maintenance design:

- Easy-to-disconnect plug allowing a very fast replacement.




Description

The kit includes a SI1082 monobloc condensate removal pump complete with float detector.

It includes a **new bracket** with a front horizontal insertion clamping system, specially designed for a fast installation of the pump inside the elbow.

Kit contents

1. SI1082 pump
2. Anti-vibrating reversible mounting bracket (galvanized steel bracket + 2 rubber pads + 1 rubber mounting for the pump)
3. 1.5m cable : 3 wires for power supply, 2 wires for NC alarm contact
4. Pump cover (flat bend)
5. 750 mm of duct model **80x60mm**
6. 500m rubber tube Ø15mm ID
7. Rubber Joint for junction to the A/C unit
 - Ceiling duct (covering the hole in the false ceiling)
 - 3 tie-wraps
 - 4 screws + rawl plug

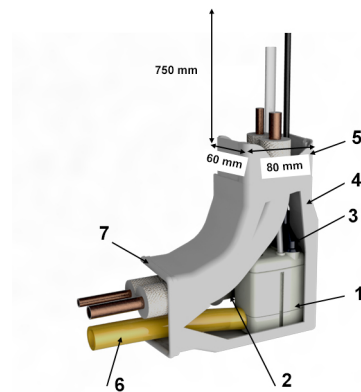

Applications

Air conditioners up to 10 kW
Wall split systems



Accessories



ACC 00105, ACC 00150, ACC 00151
Clear PVC tubing: 6 mm int.
ACC 00105 : 5 m roll
ACC 00150 : 50 m roll
ACC 00151 : reinforced 50 m roll



ACC 00205
6 self-sealing fittings for condensate removal.

Table of true flow rate SI 1082

The head losses defined in this table are calculated with 6 mm int. flexible tubing	Vertical discharge head	Total tubing length			
		5 m	10 m	20 m	30 m
		SI1082 (in l/h)	SI1082 (in l/h)	SI1082 (in l/h)	SI1082 (in l/h)
	1 m	6.8	6.3	5.3	4.3
	2 m	5.5	5	4.1	3.2
	3 m	4.2	3.8	3	2.5
	4 m	3	2.6	2.2	2
	5 m	2.2	2	1.8	1.5
	6 m		1.4	1.2	1